



Evaluation of microalgae production coupled with wastewater treatment

De Francisci, Davide; Su, Yixi; Iital, Arvo; Angelidaki, Irini

Published in:
Environmental Technology (United Kingdom)

Link to article, DOI:
[10.1080/09593330.2017.1308441](https://doi.org/10.1080/09593330.2017.1308441)

Publication date:
2018

Document Version
Peer reviewed version

[Link back to DTU Orbit](#)


Citation (APA):
De Francisci, D., Su, Y., Iital, A., & Angelidaki, I. (2018). Evaluation of microalgae production coupled with wastewater treatment. *Environmental Technology (United Kingdom)*, 39(5), 581-592.
<https://doi.org/10.1080/09593330.2017.1308441>

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

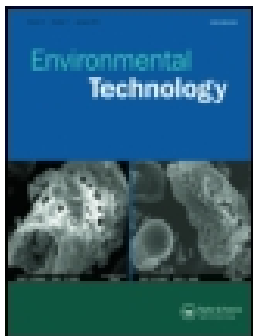

Evaluation of microalgae production coupled with wastewater treatment

Davide De Francisci, Yixi Su, Arvo Iital & Irini Angelidaki

To cite this article: Davide De Francisci, Yixi Su, Arvo Iital & Irini Angelidaki (2017): Evaluation of microalgae production coupled with wastewater treatment, Environmental Technology, DOI: [10.1080/09593330.2017.1308441](https://doi.org/10.1080/09593330.2017.1308441)

To link to this article: <http://dx.doi.org/10.1080/09593330.2017.1308441>



Accepted author version posted online: 17 Mar 2017.



[Submit your article to this journal](#)



Article views: 6



[View related articles](#)



[View Crossmark data](#)

Publisher: Taylor & Francis & Informa UK Limited, trading as Taylor & Francis Group

Journal: *Environmental Technology*

DOI: 10.1080/09593330.2017.1308441

Evaluation of microalgae production coupled with wastewater treatment

Davide De Francisci^{a1}, Yixi Su^a, Arvo Iital^b, Irini Angelidaki^a.

a. Technical University of Denmark, Department of Environmental Engineering, Building 113, DK-2800 Kgs. Lyngby, Denmark.

b. Tallin University of Technology, Department of Environmental Engineering, Ehitajate tee 5, 19086 Tallinn, Estonia.

Funding

This work resulted from the BONUS Microalgae project was supported by BONUS (Art 185), funded jointly by the EU and the Danish Agency for Science, Technology and Innovation (DASTI), the Estonian Environmental Investment Centre (KIK) and The Swedish Foundation for Strategic Environmental Research (MISTRA).

¹ Corresponding author: *Tel:* +45 45251680

E-mail address: dadf@env.dtu.dk (D. De Francisci)

Evaluation of microalgae production coupled with wastewater treatment

Davide De Francisci^{a2}, Yixi Su^a, Arvo Iital^b, Irini Angelidaki^a.

a. Technical University of Denmark, Department of Environmental Engineering, Building 113, DK-2800 Kgs. Lyngby, Denmark.

b. Tallin University of Technology, Department of Environmental Engineering, Ehitajate tee 5, 19086 Tallinn, Estonia.

In the present study the feasibility of microalgae production coupled with wastewater treatment was assessed. Continuous cultivation of *Chlorella sorokiniana* with wastewater was tested in lab-scale flat panel photobioreactors. Biomass productivity was determined for four dilution rates (4.32 d⁻¹, 3.6 d⁻¹, 1.8 d⁻¹ and 0.72 d⁻¹). The productivity peak was 1.524 g l⁻¹d⁻¹ at the dilution rate of 2.41 d⁻¹. Nitrogen and phosphorus removals were found to be inversely proportional to dilution rates, while COD removal was found to be 50% at all the tested conditions. The biomass obtained at the highest dilution rate was characterized for its content of lipids, proteins and pigments. The average yields of fatty acid methyl esters (FAME), protein, lutein, chlorophylls and β -carotene was 62.4 mg, 388.2 mg, 1.03 mg, 11.82 mg and 0.44 mg per gram dry biomass, respectively. Economic analysis revealed that potentially more than 70 % of revenue was from the production of pigments, i.e. chlorophyllin (59.6%), lutein (8.9%) and β -carotene (5.0%) while reduction in discharging costs of the treated wastewaters could account for 19.6% of the revenue. Due to the low yield of FAME and the low market price of biodiesel, the revenue from the above was found to be the least profitable (1.4%). Even when taking into account all these different revenues combined, this cultivation strategy was found with the current prices to be uneconomical. Power consumption for artificial light was responsible for the 94.5% of the production costs.

Keywords: *Chlorella sorokiniana*, biorefinery, wastewaters, photobioreactors, economic analysis

² Corresponding author: Tel: +45 45251680

E-mail address: dadf@env.dtu.dk (D. De Francisci)

Introduction

Increasing concerns about climate change and sustainability of fossil fuels based economies have brought interest to microalgae for potential to establish bio-based economy, mainly due to their higher areal productivity over traditional biomasses [1]. Nevertheless, algal biomass production cost is still one major obstacle for commercialization of algae-derived products, especially for the low-value ones such as biofuels. As a consequence, current application of algal biomass is centered on high-value products (i.e. health, cosmetics, nutraceutical and food) [2]. In order to make the production of algal biomass profitable, efforts can be made on process integration, algal biology and cultivation system design [1, 3]. First, it is strongly recommended to produce biofuel simultaneously with value-added co-products, following a biorefinery strategy [4]. Furthermore, the combination of microalgae production with wastewater treatment for removal of nutrients and hazardous compounds can lead to a further step towards a cost-effective process, by saving the costs for N and P fertilizers when using nutrient rich streams [5, 6]. Moreover, revenue from wastewater treatment would help the overall process economy.

In this context, selection of appropriate algal species is pivotal: the ability of the species to grow in specific wastewaters and then generate biomass suitable for further transformation to high value products has a direct impact on the potential revenues. Furthermore, the use of wastewater as the culturing media adds stricter requirements for robustness of microalgae against adverse conditions, such as contamination with possible toxic compounds and competition with undesired microorganisms [7, 8]. Zhou et al. [9] isolated multiple species from natural environments and screened five potential high lipid producers in concentrated municipal wastewater by DNA sequencing: *Auxenochlorella protothecoides*, *Hindakia* sp., *Scenedesmus* sp. and two *Chlorella* sp.

A similar work found two *Chlorella* species, *C. protothecoides* and *C. kessleri* were growing better in wastewater compared to 14 other algal strains [10]. Additionally, several studies dealing with algal consortia suggested *Chlorella* sp. and *Scenedesmus* sp. as relatively robust species that can grow in wastewater [11-13].

Apart from the selected species, biomass production coupled with wastewater treatment depends on a variety of operation parameters such as type of wastewater, light intensity and cycle, pH, temperature, dilution rate, etc. [14]. Flow rate of medium, that determines the rate of nutrient supply, largely impacts the growth rates of the microorganisms. Biomass concentration at steady state depends on the equilibrium between specific growth rate and the imposed dilution rate [15]. Dilution rate is following the growth rate of algae up to maximum growth rate whereafter at higher dilution rates wash out would happen. As a consequence, the maximum biomass productivity would be reached at a specific dilution rate which is close (but lower) to the maximum growth rate of the algae at that specific condition. Previous studies investigated the effect of dilution rates on the overall productivity and observed that the optimal productivity corresponds to medium values of the dilution rates. This is probably due to less optimal growth conditions which not support maximum rates of the algae, such nutrients deficiency or content of potential inhibitors [16, 17].

Reducing production cost and/or increasing productivity are possible ways to improve the economics of algal biomass production. The present study aims to further investigate and assess the biomass productivity and the biomass composition of selected microalgae species grown in wastewater, instead of widely used synthetic media for supply of nutrients. Use of wastewater would reduce cost for nutrients (necessary for the cultivation) into revenue deriving from the removal of the same nutrients as environmental service. In this context, the algal biomass was used as a source for high

added value products and biofuels to offset the production costs. Additionally, attempts to improve the productivity via strain selection and optimization of cultivation-operation were made. Based on the data generated, the economics of algal biomass production was assessed in four scenarios considering an annual production of 330 days.

Materials and methods

Algal strains, medium and wastewater

Microalgal species *Chlorella sorokiniana* and *Scenedesmus obliquus* were chosen for the initial screening because they are frequently found in different wastewaters [11-13] and thus are expected to show robust growth in such environments. The strains were obtained from SCAAP (Scandinavian Culture Collection of Algae & Protozoa, Denmark) and cultivated in sterilized Woods Hole medium (MWC) [18] containing selenium.

Mixed influent industrial/municipal wastewater from Kohtla-Järve, Estonia was selected for testing with algae based on the assumption that it represents typical conditions in larger municipalities where industrial and municipal wastewaters as well as storm water are mixed and then treated together. The mixed industrial/municipal probe represented time-adjusted average water sample collected over 24 hours. The water sample has been analysed by the Estonian Environment Research Centre and the list of substances for the analyses involved COD_{Cr}, TOC, BOD₇, NO₂-N, NO₃-N, NH₄-N, N_{tot}, PO₄-P and P_{tot}. A number of hazardous compounds were present in the wastewater and were analysed by Kohtla-Järve WWTP using standard procedures (Table S1 in Supplementary Material). Part of the collected water sample was frozen (-20°C) and transported to Danish Technical University for further tests with microalgae.

For all the cultivation experiments, wastewater underwent sedimentation to remove the majority of solid particles. Sedimentation is considered an economic method in large scale applications for gross separation of larger particles and therefore it was chosen as separation methodology. Analysis of nutrients and organic compounds of the supernatant after sedimentation was performed at the Technical University of Denmark.

Due to storage and sedimentation of the wastewater samples, some changes in the water quality occurred, resulting in lower COD, N_{tot} , and P_{tot} concentrations and higher $NH_4\text{-N}$ content (Table 1).

Microplate screening

Screening for the best performing algal strain in the wastewater was carried out in 24-well microplates (PE VISIPLATE, 24 well black-walled, clear bottomed). The microplates were incubated at room temperature, illuminated by LED at $400 \pm 50 \mu\text{mol photons m}^{-2} \text{ s}^{-1}$ and shaken at 140 rpm with a 50 mm throw. Growth was monitored by fluorescence (440 nm emission, 690 nm detection) using a Synergy Mx microplate reader (BioTek Instruments, Inc., USA).

Cultivation procedures, well-top membranes, growth rate calculations, and detection limits were as described in recent study [19]. Each of the strains was inoculated in triplicates in 100% wastewater or mixtures of wastewater and MWC + se medium with varying percentages of wastewater (75%, 50% and 25%). Culture volume in each well was 2 ml. The screening was repeated for two generations for both species.

Photobioreactor cultivation

A flat-panel photobioreactor (Algaemist reactor, Wageningen University) was used to cultivate *C. sorokiniana* with the wastewater pretreated by sedimentation. Undiluted

wastewater was used for this set of cultivation experiments due to the positive results obtained from the microplate screening where cultivation in undiluted wastewater supported algal growth (see Results and discussion: Microplate screening).

The cultivation was initiated in batch mode. Parameter settings in this experiment are listed in Table 2, and were chosen according to the optimal growth condition for this species [20-22]. When the growth reached early stationary phase, the cultivation was switched to continuous mode. The dilution rate was set to 4.32 d^{-1} , which was close to the maximum specific growth rate observed during the exponential phase in batch mode. Thereafter, the dilution rate was stepwise decreased to 3.6 d^{-1} , 1.8 d^{-1} and 0.72 d^{-1} . Optical density (OD_{750}) throughout the cultivation was monitored. Moreover, biomass was collected for each dilution rate when the OD value was stable. The temperature of the effluent was maintained at 4°C to inhibit algae metabolism and growth after harvest.

Analytical methods

The samples obtained from the highest dilution rate was subject to lipid, protein and pigment quantification.

Cell growth and dry cell weight

Cell growth of algae was monitored by measuring optical density at 680 and 750 nm using a Hach Lange DR2800 spectrophotometer. The correlation between optical density (OD) and dry weight (DW) concentration of samples (C_x) was determined as described in Van Wageningen et al. [17]. The correlation curve between OD_{750} of cell suspensions and dry weight of the biomass resulted to be linear, $C_x = 0.31OD_{750} - 0.04$ with a $R^2 > 0.95$.

Lipid determination

The procedure for the quantification of fatty acid methyl esters (FAMES) was based on the modified Folch method [23]. 10 mg of freeze-dried and powdered biomass was mixed to a solvent mixture of chloroform: methanol (2 mL, 2:1, v/v) in duplicate. After vortexing for 20 minutes, FAMES were formed by addition 1 mL of methanol and 300 μ L of H₂SO₄ and incubation at 100°C for 20 minutes. After cooling down, 1 mL of distilled water was added to the sample, which was then vortexed for 5 minutes and centrifuged at 4,000 rpm for 10 minutes. The lower layer including the organic solvent was analysed with gas chromatography (HP 5890, Agilent, USA) with a flame ionized detector (FID) and INNOWAX capillary column (Agilent, USA). The GC column temperature was programmed as follows: (1) initial column temperature at 50 °C, hold for 1 min, (2) increase to 200 °C at a rate of 15 °C min⁻¹, hold for 9 min, and (3) increase to 250 °C at a rate of 2 °C min⁻¹, maintain for 2 min. Individual FAME component was identified and quantified by comparing the retention times and peak areas with those of the FAMES standard solutions, respectively. The internal standard was Supelco 37 Component FAME Mix, item no. 47885- U, Sigma–Aldrich.

Protein determination

For protein hydrolysis, duplicates of 50 mg biomass were suspended in 6 ml of 6N HCl and transferred in close vessels. The vessels were flashed with nitrogen to prevent oxidative degradation of some oxygen/sensitive amino acids. The vessels were then microwaved for 30 min at 150 and 500W (Multiwave 3000, Anton Paar). Samples were then freeze-dried to remove HCl. The residues were resuspended in 400 μ L milliQ H₂O and filtered through 0.22 μ m syringe filters before the protein quantification by in-needle

derivatization HPLC-FLD (Dionex UltiMate 3000, Thermo Scientific). Amino-acids were separated in a c18 reversed phase column (Eclipse Plus C18, Agilent Technologies, USA) with an in-line guard column (EC 4/2 Universal RP, Macherey-Nagel, Germany) and mobile phases A (10mM Na₂HPO₄, 10 mM Na₂B₄O₇) and B (methanol: acetonitrile: water, 45:45:10). The flow rate was 0.420 mL min⁻¹. Quantitative analyses were performed by means of calibration curves using a commercial amino-acid mix standard (AAS18 Fluka).

Pigments determination

Two milligrams of freeze-dried biomass were mixed with 3 ml of 90% acetone in duplicates. Well mixed samples were sonicated in ice bath for 10 min (Branson 3510MT). The supernatant was separated from the residual biomass by centrifugation at 13,000 rpm for 10 min. A Zorbax Eclipse plus C8 RRHD 1.8 µm 3.0×150 mm column was used for UHPLC separation at 60 °C with a 75 min separation time. Detection utilized UV–VIS at 450 nm. Quantification was done relative to individual pigment standards obtained from DHI, Hørsholm, diluted from 15 to 1500 µg L⁻¹.

Nutrient measurements

Samples corresponding to each dilution rates were centrifuged in order to harvest biomass. The supernatants were collected for nutrient composition analysis. Contents of COD, total nitrogen (N_{tot}), total phosphorus (P_{tot}) and ammonium were determined for the supernatant using Hach Lange Cuvette Kits. (LCK314, LCK238 and LCK348, while Spectroquant® ammonium test (Merck Millipore) was used for the measurement of ammonium.

227 *Estimation of biomass market value*

228 Evaluation of economic potential of algae biomass was performed by calculating the
229 gross profit, taking into account only the difference between revenue and the operating
230 cost, without deducting costs for overhead, payroll, taxation and interest.

231 Specifically, a value of unit biomass was calculated as sum of revenues from all
232 products of interest, including biodiesel, proteins and pigments (e.g. lutein, chlorophylls
233 and β -carotene) as well as benefit for removing COD, N and P from the wastewater.
234 Market value for each bioproduct obtained per unit biomass can be calculated from the
235 experimentally obtained yields, i.e. FAME (C_f), amino acid (C_{aa}) and pigments (C_p).
236 Prices of desirable products (Table 3) were obtained from an e-commerce website:
237 www.alibaba.com. Specifications of the benchmark products can be found on the
238 company pages. The revenue from bio-products is the sum of production of each
239 product (P_i) multiplied with its price, shown in the following equation.

$$Revenue_p = \sum_i C_i \cdot Price_i$$

240 Estimation of production cost was based on data from literature. Aim with this
241 preliminary economic assessment was to estimate which costs – revenues are more
242 important for the operational cost balance. The estimation only includes operation costs
243 and not initial investment costs. The rationale behind this was to generate a dataset that
244 could serve as a preliminary assessment of the profitability of this specific concept. In
245 case the process resulted to be not economically feasible based on operational costs and
246 revenues, it would be logical to assume investments for facilities construction would
247 make the economic prospects even more difficult. CO₂ supply was the only input
248 needed cost, while nitrogen and phosphorus were considered free as present in the
249 wastewater. Power consumptions for light, CO₂ sparging and harvesting were
250 considered main items of production cost for algal biomass. Additionally, cationic

coagulant was chosen for the estimation of the harvesting costs due to its effectiveness and low cost compared to others [24]. Detailed calculation can be found in supplementary material.

Scenarios for potential cost reduction

A basic economic analysis was conducted to evaluate potential cost reduction opportunities. In addition to the base case (where costs for CO₂ and LED were both taken into account), three alternative scenarios were proposed. Case (1) assumed industrial flue gas containing CO₂ was provided freely e.g. from a nearby power plant without significant influence on cell growth and composition. In case (2), the cost for power of lighting was eliminated by substituting artificial light with natural light source (i.e. sunlight). Because of the unstable supply as a consequence of day-night cycle and seasonal variation, specific growth rate and cell density was assumed to decrease by 14% and 31%, respectively [25]. In the third scenario, assumptions in case (1) and (2) were combined.

Statistics analysis

IBM SPSS Statistics (Version 22) was used for statistical analysis. Data comparison was performed using one way ANOVA test and unpaired t-test with 95% confidential intervals.

Results and discussion

Microplate screening

Based on specific growth rate (Figure 1), *C. sorokiniana* shows higher robustness in this wastewater over *S. obliquus* at all conditions. The highest specific growth rates are 2.40

d^{-1} and $2.04 d^{-1}$ for *C. sorokiniana* and *S. obliquus*, respectively, which are obtained in a mixture with 50% wastewater in the second generation. Acclimation in the second generation was observed for both species. Furthermore, when wastewater concentration was higher than 50%, growth rates were inversely proportional to wastewater concentration for both species, which suggests possible inhibitory effects of wastewater on the algal growth.

This could be due to presence of hazardous compounds from the oil-shale industry in the KJ wastewater, which can potentially be harmful to microalgae species. At the same time, undiluted wastewater contains the highest concentration of nutrients and therefore leads to the highest cell density of *C. sorokiniana* (Figure 2), even with a lower growth rate. The same tendency was observed in a previous study, where 100% wastewater resulted in initial inhibition to algae, but eventually it resulted in the highest algae density compared to diluted concentrate [26]. Based on these results and on considerations that dilution of wastewater would be more technical complex and costly, undiluted wastewater was used for the photobioreactor (PBR) experiments.

Algae productivity

Average biomass productivities and biomass concentration measured at steady states of four dilution rates are shown in Figure 3. The cultivation was initiated with the dilution rate ($4.32 d^{-1}$) close to the maximal specific growth rate ($4.56 d^{-1}$) observed in a batch cultivation in the same wastewater. This dilution rate led to the lowest biomass concentration ($0.18 g l^{-1}$) and, as a consequence, to the lowest productivity ($0.8 g l^{-1}d^{-1}$). With the decrease of dilution rates, biomass concentration rose to $1.44 g l^{-1}$, (dilution rate of $0.72 d^{-1}$) corresponding to low productivity ($0.95 g l^{-1}d^{-1}$). The highest biomass productivity ($1.46 g l^{-1}d^{-1}$) was exhibited at a dilution rate of $1.8 d^{-1}$. The curve

describing the correlation between dilution rate and biomass productivity was fitted to a binomial equation, and the highest productivity was estimated to be $1.524 \text{ g l}^{-1}\text{d}^{-1}$ at a dilution rate of 2.41 d^{-1} , corresponding to a cell density of 0.63 g l^{-1} .

The trend seen with decrease of cell concentration with increasing dilution rates is contradictory to the theoretical expected. The expected trend would be that the cell concentration was stable with increasing dilution rate, until initiation of wash out which would correspond to a sharp decrease the cell concentration.

The explanation to the observed relationship could be due to the spontaneous flocculation and wall attachment occurred during the cultivation (Figure 4). The calibration curve (section Analytical methods) used to calculate cell concentration was generated using homogeneously suspended cells, and therefore OD measurements do not reflect cell concentrations of flocculant cell associations. High flow rates (high dilution rates) in upflow reactor systems are causing selection pressure to the cells. Only cells managing to create flocs are resisting wash out, by creating flocs presenting larger diameter than the single cells and thereby having a higher sedimentation rate, while the suspended cells are washed out of the reactor. Therefore high dilution rates are promoting flocculation and thereby OD measurements at these high rates are giving an underestimation of the cell concentration.

Previous studies employed the same photobioreactor system (flat plate) used in the current one [16, 17] and have found similar trends. The operation conditions and growth data achieved in these previous publications listed in Table 4 for comparison. In Van Wagenen et al. [17] parallel experiments were conducted with a high light intensity ($2100 \mu\text{mol m}^{-2} \text{ s}^{-1}$) and a low light intensity ($200 \mu\text{mol m}^{-2} \text{ s}^{-1}$). The operating conditions of the present study (wastewater instead of synthetic media and low light intensity) are very similar.

However, even if the light intensity in the present work was twice as much as the low light experiment in Van Wageningen et al. [17], lower biomass density and productivity were obtained. A reason for this difference could be the different nutrient supplements in the media used. The nutrient content, especially nitrogen in Kohtla-Järve influent wastewater was considerably lower compared to the aforementioned study (Table 5). It has been proven that biomass concentration and $\text{NO}_3\text{-N}$ supply are positively correlated, up to a saturation level of about $30 \text{ mg NO}_3\text{-N l}^{-1}$ (further increase of cell density was limited, which may be caused by the limitation of other nutrients) [27]. The positive effect of increasing nitrogen and phosphorus concentration on algal growth was also reported, demonstrating that the highest level of algal biomass corresponded to the highest initial N_{tot} of 25 mg l^{-1} [28].

Nutrient removal

Nitrogen and phosphorus concentrations were determined for the treated wastewater and for the resulting biomass after harvesting. Nutrient contents of the treated wastewater were compared with the composition of untreated wastewater.

Removal efficiencies at different dilution rates are shown in Figure 5. Overall, the highest removal efficiencies ($> 90\%$) were observed at the lowest dilution rate (0.72 d^{-1}). With the decrease of dilution rate, the removals of total nitrogen, total phosphorus and ammonium were steadily increased. However, the removal of COD for all dilution rates remained around 50% . Limited COD reduction was also previously reported [29, 30]. This indicates that the residual $\sim 50\%$ of COD consisted by organics not degradable by microalgae. This also shows that organic carbons were consumed very quickly in these experiments and therefore were the preferred carbon source by *C. sorokiniana* over CO_2 (heterotrophy/mixotrophy). This is in agreement with a previous study, in

which batch cultivations of *C. sorokiniana* were conducted at increasing concentration of organic carbon, with the highest growth rate corresponding to the highest concentration [31].

Van Wagenen et al. [17] observed very high removal efficiencies for $\text{PO}_4\text{-P}$ in all the tested dilution rates. In the present work phosphorus removal rate was instead increased with dilution rate. An explanation for this could be the fact that phosphorus was in excess in the wastewater used in this previous study (N/P ratio was 36.5:1 in Van Wagenen et al. [17] while it was only 14.9:1 in the Kohtla-Järve influent wastewater which we used in this study).

Finally, average concentrations of mineral elements present in the algal biomass are 8.87 % N and 1.04 % P, which partly represent the nutrients transferred from wastewater to biomass. Similar N and P contents were also reported when microalgae were grown in dairy manure and obtained biomass consisting of 7 % N and 1% P [32].

Biomass characterization

Compositional analysis of the algal biomass grown in wastewater is listed in Table 6. Palmitic acid (16:0), palmitoleic acid (16:1), oleic acid (18:1) and linolenic acid (18:3) were found to be the most abundant fatty acids present in the algal biomass (Table 7). This is in agreement with typical fatty acid composition of *C. sorokiniana* found in literature [33-36].

Fatty acid content in *C. sorokiniana* can vary from 0.6% to 47.51% depending mainly on the growth conditions (Table 8). FAME yield of current study is relatively low compared to fatty acid contents of *C. sorokiniana* reported in literature. Nitrogen starvation has been widely recognized as a stress condition which stimulates the accumulation of lipids. Li et al. [46] showed that the initial nitrogen concentration in the

medium was positively correlated with the growth of *C. sorokiniana*, but reversely correlated with the lipid content. Lipid accumulation is believed to be a consequence of the inhibition of proteins and starch biosynthesis which usually occurs in stationary phase [47].

Furthermore, composition of the lipid profile is in general correlated to culturing conditions, and this may be another reason for low fatty acid content in the algal biomass produced in the present work. In contrast to polar lipids (e.g. membrane components), neutral lipids are responsible for energy storage in cells and are precursors for FAME production. It has been shown that different nutritional conditions can affect the percentage of neutral lipids within the total lipid content varying from 2.9% to 60% [36]. In addition, low irradiation, as in the present study, induces the formation of polar lipids, whereas the formation of triacylglycerols is favoured at high light intensity conditions [48]. Also, although results show that available organic carbon source was consumed, nitrogen and phosphorus were still abundant in the effluent of culture (Figure 5). Therefore, microalgae in this condition were not stressed by nutrient limitation and thus tended to invest carbon and energy for cell growth. The high protein content 38.82% (w/w) in the algal biomass is an indicator for the active proliferation. In conclusion, in the present work the high growth rate (supported by sufficient nutrient supplement) was probably the reason for the relatively low fatty acid yield. Clearly, there is a tradeoff between biomass productivity and lipid content that cannot be achieved simultaneously. This is why two-phase cultivation strategies are a possible solution for the economics of algae cultivation [49, 50].

Estimation of biomass value and economic potential

The revenue generated from cultivating *C. sorokiniana* in this specific wastewater is estimated to be 3.27 € kg⁻¹ dry biomass, which includes 2.63 € kg⁻¹ (80.4%) from the production of valuable bioproducts and 0.64 € kg⁻¹ (19.6%) from removal of nutrients from wastewater as an environmental service (Table 9).

More specifically, chlorophyllin accounts for 59.7% of the total value, whereas the share of biodiesel is negligible (1.4%) as a consequence of the low FAME yield. As per kilo of microalgae produced, roughly 1580 L wastewater can be treated at a dilution rate of 2.41 d⁻¹, which makes significant contribution (19.6%) to the overall revenue. However, the nutrient removal efficiencies in this condition are unsatisfactory for treating wastewater. Removal efficiencies of only 52.1% for COD, 57.5% for nitrogen and 68.8% for phosphorus were achieved. The cost for producing a kilo of microalgae was estimated to be 12.46 € kg⁻¹ comprising 94.5% for power for illumination, whereas the remaining 5.5% was for CO₂ supply (2.7%), cost of cationic flocculant (0.4%), power for harvest (2.1%) and aeration (0.3%).

As already mentioned, biodiesel is the least remunerative product. Despite the fast growth of *C. sorokiniana*, the parallel low FAME production largely affects the economics of the strategy presented in this study. Furthermore, coupling biomass production and wastewater treatment contributes to the total revenue. However, the COD and nutrients removal efficiencies at the dilution rate, 2.41 d⁻¹ were poor. Consequently, the resulted wastewater may not fulfill the quality for reuse and may require additional steps for further treatment.

Finally, the economic potential in the case of utilizing artificial light is -9.19 € kg⁻¹-biomass, showing economically unsustainable production.

Scenarios for potential cost reduction

Economics of algal biomass production was assessed in four scenarios considering an annual production of 330 days. The results indicate the economic potential can be positive only when the cost for artificial light is eliminated (Figure 6). Results show that the substitution of artificial light with sunlight can reduce production cost by 96.0%, whereas the reduction resulted from using free CO₂ is 2.7%. The elimination of CO₂ cost has relatively little effect (+3.6%) on the overall cost reductions. By contrast, economical potential can be increased by 116.1% and become positive as a result of considerable drop in cost for artificial light.

On the other hand, the substitution of artificial light by sunlight hypothetically causes 14% and 31% reduction in specific growth rate and cell density, respectively [25], resulting in 40.7% reduction in biomass productivity. As a consequence, annual revenue is reduced by 39.6%. In addition, because nitrogen removal is 56% less in a light-dark cycle condition in comparison with continuous illumination [51], the shorter illumination period leads to further decrease in nitrogen removal efficiency to 26.8%.

This analysis highlights that excluding use of artificial light is an imperative to enable sustainable production of algal biomass for any purpose. In the base case, at least 76.5% of the cost for artificial light needs to be reduced to ensure breakeven for the necessary utilities for biomass production (e.g. electricity, flocculant and CO₂). In the case that excludes the costs for CO₂ and light, biomass cost is reduced to 424 € t⁻¹, which is substantially lower than 5,960 € t⁻¹ as reported in [52] and 2,340 \$ t⁻¹ reported in [53]. Exclusion of capital cost and operational cost such as labour and general plant overhead is one major reason for the underestimation in our estimation. Furthermore, some basic assumptions for the calculation are different. For example, aeration power accounted for the biggest fraction of cost in Norsker et al.'s calculation, which is relatively low in the present work.

Conclusion

This work demonstrated that microalga *C. sorokiniana* can well adapt to the wastewater chosen for this assessment and thus exhibits high biomass productivity. The cultivation led to a significant but not optimal removal of COD, N and P. Nitrogen and phosphorus removals were observed to be inversely proportional to dilution rates, while COD removal was found to be constant. Microalgae cultivation can therefore be considered a promising tool for partial nutrient recovery from wastewaters, but not yet an ideal tool to meet wastewater treatment plants requirements. In this context, the nutrient recovery translates in the production of valuable biomass that could make the entire process profitable. The composition of the resulting biomass was determined in respect to lipids, proteins and pigments content. The economic assessment performed on the entire process showed that pigments in particular could play a pivotal role in economics of algae production and should be the primary goal to pursue. It is noteworthy that the cultivation conditions in the present study were generally chosen to ensure optimal microalgae growth and optimal biomass productivity. However, the same conditions translate in poor content of high value products in the same biomass. For this reason it is advisable to develop two-phase cultivation strategies, in which microalgae are first kept in optimal growth conditions to generate high biomass yield, and then stressed to increase the high added value products content in the same biomass.

Finally the economic assessment performed on this specific species/wastewater combination proved this cultivation strategy to be uneconomical, mostly due to the energy consumption for artificial light, which accounts for 94.5% of the production costs.

475

476 **Word count: 5,113**

477

478

479

480 **References**

481

- 482 [1] Chisti Y. Biodiesel from microalgae. *Biotechnology Advances*. 2007;25(3):294-306.
- 483 [2] Foley PM, Beach ES, Zimmerman JB. Algae as a source of renewable chemicals:
484 opportunities and challenges. *Green Chemistry*. 2011;13(6):1399-405.
- 485 [3] Ación F, Fernández J, Magán J, et al. Production cost of a real microalgae production
486 plant and strategies to reduce it. *Biotechnology Advances*. 2012;30(6):1344-53.
- 487 [4] Rawat I, Bhola V, Kumar RR, et al. Improving the feasibility of producing biofuels
488 from microalgae using wastewater. *Environmental Technology*. 2013;34(13-
489 14):1765-75.
- 490 [5] Abdelaziz AE, Leite GB, Hallenbeck PC. Addressing the challenges for sustainable
491 production of algal biofuels: I. Algal strains and nutrient supply. *Environmental*
492 *Technology*. 2013;34(13-14):1783-805.
- 493 [6] Christenson L, Sims R. Production and harvesting of microalgae for wastewater
494 treatment, biofuels, and bioproducts. *Biotechnology Advances*. 2011;29(6):686-702.
- 495 [7] Cho S, Luong TT, Lee D, et al. Reuse of effluent water from a municipal wastewater
496 treatment plant in microalgae cultivation for biofuel production. *Bioresource*
497 *Technology*. 2011;102(18):8639-45.
- 498 [8] Osundeko O, Dean AP, Davies H, et al. Acclimation of microalgae to wastewater
499 environments involves increased oxidative stress tolerance activity. *Plant and Cell*
500 *Physiology*. 2014;55(10):1848-57.
- 501 [9] Zhou W, Li Y, Min M, et al. Local bioprospecting for high-lipid producing
502 microalgal strains to be grown on concentrated municipal wastewater for biofuel
503 production. *Bioresource Technology*. 2011;102(13):6909-19.
- 504 [10] Li Y, Zhou W, Hu B, et al. Integration of algae cultivation as biodiesel production
505 feedstock with municipal wastewater treatment: strains screening and significance
506 evaluation of environmental factors. *Bioresource Technology*. 2011;102(23):10861-
507 7.
- 508 [11] de Godos I, Vargas VA, Blanco S, et al. A comparative evaluation of microalgae
509 for the degradation of piggery wastewater under photosynthetic oxygenation.
510 *Bioresource Technology*. 2010;101(14):5150-8.
- 511 [12] Mustafa E-M, Phang S-M, Chu W-L. Use of an algal consortium of five algae in
512 the treatment of landfill leachate using the high-rate algal pond system. *Journal of*
513 *Applied Phycology*. 2012;24(4):953-63.
- 514 [13] Samorì G, Samorì C, Guerrini F, et al. Growth and nitrogen removal capacity of
515 *Desmodesmus communis* and of a natural microalgae consortium in a batch culture
516 system in view of urban wastewater treatment: Part I. *Water Research*.
517 2013;47(2):791-801.
- 518 [14] Larsdotter K. Wastewater treatment with microalgae-a literature review. *Vatten*.
519 2006;62(1):31.
- 520 [15] Fernandez F, Camacho FG, Perez J, et al. Modeling of biomass productivity in
521 tubular photobioreactors for microalgal cultures: effects of dilution rate, tube

- diameter, and solar irradiance. *Biotechnology and Bioengineering*. 1998;58(6):605-16.
- [16] Cuaresma M, Janssen M, Vilchez C, et al. Productivity of *Chlorella sorokiniana* in a short light- path (SLP) panel photobioreactor under high irradiance. *Biotechnology and Bioengineering*. 2009;104(2):352-9.
- [17] Van Wageningen J, Pape ML, Angelidaki I. Characterization of nutrient removal and microalgal biomass production on an industrial waste-stream by application of the deceleration-stat technique. *Water Research*. 2015;75:301-11.
- [18] Guillard RR. Culture of marine invertebrate animals: culture of phytoplankton for feeding marine invertebrates. New York (NY): Springer; 1975.
- [19] Van Wageningen J, Holdt SL, De Francisci D, et al. Microplate-based method for high-throughput screening of microalgae growth potential. *Bioresource Technology*. 2014;169:566-72.
- [20] Li T, Zheng Y, Yu L, et al. High productivity cultivation of a heat-resistant microalga *Chlorella sorokiniana* for biofuel production. *Bioresource Technology*. 2013;131:60-7.
- [21] Yoshida N, Ikeda R, Okuno T. Identification and characterization of heavy metal-resistant unicellular alga isolated from soil and its potential for phytoremediation. *Bioresource Technology*. 2006;97(15):1843-9.
- [22] Zheng Y, Chi Z, Lucker B, et al. Two-stage heterotrophic and phototrophic culture strategy for algal biomass and lipid production. *Bioresource Technology*. 2012;103(1):484-8.
- [23] Folch J, Lees M, Sloane-Stanley G. A simple method for the isolation and purification of total lipids from animal tissues. *J Biol Chem*. 1957;226(1):497-509.
- [24] Udom I, Zaribaf BH, Halfhide T, et al. Harvesting microalgae grown on wastewater. *Bioresource Technology*. 2013;139:101-6.
- [25] Wang S-K, Hu Y-R, Wang F, et al. Scale-up cultivation of *Chlorella ellipsoidea* from indoor to outdoor in bubble column bioreactors. *Bioresource Technology*. 2014;156:117-22.
- [26] Kong Q-X, Li L, Martinez B, et al. Culture of microalgae *Chlamydomonas reinhardtii* in wastewater for biomass feedstock production. *Applied Biochemistry and Biotechnology*. 2010;160(1):9-18.
- [27] Mostert ES, Grobbelaar JU. The influence of nitrogen and phosphorus on algal growth and quality in outdoor mass algal cultures. *Biomass*. 1987;13(4):219-33.
- [28] Xin L, Hong-ying H, Ke G, et al. Effects of different nitrogen and phosphorus concentrations on the growth, nutrient uptake, and lipid accumulation of a freshwater microalga *Scenedesmus* sp. *Bioresource Technology*. 2010;101(14):5494-500.
- [29] Min M, Wang L, Li Y, et al. Cultivating *Chlorella* sp. in a pilot-scale photobioreactor using centrate wastewater for microalgae biomass production and wastewater nutrient removal. *Applied Biochemistry and Biotechnology*. 2011;165(1):123-37.
- [30] Ruiz J, Álvarez-Díaz P, Arbib Z, et al. Performance of a flat panel reactor in the continuous culture of microalgae in urban wastewater: prediction from a batch experiment. *Bioresource Technology*. 2013;127:456-63.
- [31] Kim S, Park J-e, Cho Y-B, et al. Growth rate, organic carbon and nutrient removal rates of *Chlorella sorokiniana* in autotrophic, heterotrophic and mixotrophic conditions. *Bioresource Technology*. 2013;144:8-13.
- [32] Mulbry W, Kondrad S, Pizarro C, et al. Treatment of dairy manure effluent using freshwater algae: algal productivity and recovery of manure nutrients using pilot-scale algal turf scrubbers. *Bioresource Technology*. 2008;99(17):8137-42.

- 572 [33] Chen F, Johns MR. Effect of C/N ratio and aeration on the fatty acid composition
573 of heterotrophic *Chlorella sorokiniana*. *Journal of Applied Phycology*. 1991;3(3):203-
574 9.
- 575 [34] Li T, Zheng Y, Yu L, et al. Mixotrophic cultivation of a *Chlorella sorokiniana*
576 strain for enhanced biomass and lipid production. *Biomass and Bioenergy*.
577 2014;66:204-13.
- 578 [35] Patterson GW. Effect of culture temperature on fatty acid composition of *Chlorella*
579 *sorokiniana*. *Lipids*. 1970;5(7):597-600.
- 580 [36] Wan MX, Wang RM, Xia JL, Rosenberg JN, Nie ZY, Kobayashi N, et al.
581 Physiological evaluation of a new *Chlorella sorokiniana* isolate for its biomass
582 production and lipid accumulation in photoautotrophic and heterotrophic cultures.
583 *Biotechnology and Bioengineering*. 2012;109(8):1958-64.
- 584 [37] Matsukawa R, Hotta M, Masuda Y, et al. Antioxidants from carbon dioxide fixing
585 *Chlorella sorokiniana*. *Journal of Applied Phycology*. 2000;12(3-5):263-7.
- 586 [38] Hunt RW, Chinnasamy S, Bhatnagar A, et al. Effect of biochemical stimulants on
587 biomass productivity and metabolite content of the microalga, *Chlorella sorokiniana*.
588 *Applied Biochemistry and Biotechnology*. 2010;162(8):2400-14.
- 589 [39] Wan M, Liu P, Xia J, et al. The effect of mixotrophy on microalgal growth, lipid
590 content, and expression levels of three pathway genes in *Chlorella sorokiniana*.
591 *Applied Microbiology and Biotechnology*. 2011;91(3):835-44.
- 592 [40] Lu S, Wang J, Niu Y, et al. Metabolic profiling reveals growth related FAME
593 productivity and quality of *Chlorella sorokiniana* with different inoculum sizes.
594 *Biotechnology and Bioengineering*. 2012;109(7):1651-62.
- 595 [41] Chen C-Y, Chang J-S, Chang H-Y, et al. Enhancing microalgal oil/lipid production
596 from *Chlorella sorokiniana* CY1 using deep-sea water supplemented cultivation
597 medium. *Biochemical Engineering Journal*. 2013;77:74-81.
- 598 [42] Kobayashi N, Noel EA, Barnes A, et al. Characterization of three *Chlorella*
599 *sorokiniana* strains in anaerobic digested effluent from cattle manure. *Bioresource*
600 *Technology*. 2013;150:377-86.
- 601 [43] Zheng Y, Li T, Yu X, et al. High-density fed-batch culture of a thermotolerant
602 microalga *Chlorella sorokiniana* for biofuel production. *Applied Energy*.
603 2013;108:281-7.
- 604 [44] Ramanna L, Guldhe A, Rawat I, et al. The optimization of biomass and lipid yields
605 of *Chlorella sorokiniana* when using wastewater supplemented with different
606 nitrogen sources. *Bioresource Technology*. 2014;168:127-35.
- 607 [45] Junttila D, Bautista M, Monotilla W. Biomass and lipid production of a local isolate
608 *Chlorella sorokiniana* under mixotrophic growth conditions. *Bioresource*
609 *Technology*. 2015;191:395-8.
- 610 [46] Li YX, Zhao FJ, Yu DD. Effect of nitrogen limitation on cell growth, lipid
611 accumulation and gene expression in *Chlorella sorokiniana*. *Brazilian Archives of*
612 *Biology and Technology*. 2015;58(3):462-7.
- 613 [47] Deng X, Fei X, Li Y. The effects of nutritional restriction on neutral lipid
614 accumulation in *Chlamydomonas* and *Chlorella*. *African Journal of Microbiology*
615 *Research*. 2011;5(3):260-70.
- 616 [48] Khotimchenko SV, Yakovleva IM. Lipid composition of the red alga *Tichocarpus*
617 *crinitus* exposed to different levels of photon irradiance. *Phytochemistry*.
618 2005;66(1):73-9.
- 619 [49] Samorì G, Samorì C, Pistocchi R. Nutrient removal efficiency and physiological
620 responses of *Desmodesmus communis* at different HRTs and nutrient stress

- condition using different sources of urban wastewater effluents. *Applied Biochemistry and Biotechnology*. 2014;173(1):74-89.
- [50] Su C-H, Chien L-J, Gomes J, et al. Factors affecting lipid accumulation by *Nannochloropsis oculata* in a two-stage cultivation process. *Journal of Applied Phycology*. 2011;23(5):903-8.
- [51] Lee K, Lee C-G. Effect of light/dark cycles on wastewater treatments by microalgae. *Biotechnology and Bioprocess Engineering*. 2001;6(3):194-9.
- [52] Norsker N-H, Barbosa MJ, Vermuë MH, et al. Microalgal production—a close look at the economics. *Biotechnology Advances*. 2011;29(1):24-7.
- [53] Chauton MS, Reitan KI, Norsker NH, et al. A techno-economic analysis of industrial production of marine microalgae as a source of EPA and DHA-rich raw material for aquafeed: Research challenges and possibilities. *Aquaculture*. 2015;436:95-103.

Table 1 Composition of KJ wastewater.

Indicator	Before sedimentation	After sedimentation
COD	442 mg O ₂ l ⁻¹	386.9 mg O ₂ l ⁻¹
N _{tot}	117 mg N l ⁻¹	48.6 mg N l ⁻¹
P _{tot}	10.5 mg P l ⁻¹	7.2 mg P l ⁻¹
NH ₄ -N	34.7 mg N l ⁻¹	46.7 mg N l ⁻¹

Table 2. Parameter settings for PBR cultivation

Parameter	Setting
Temperature	37°C
pH	7.0
Light intensity	400 $\mu\text{mol m}^{-2} \text{s}^{-1}$
Air flow rate	160 ml min^{-1}
CO ₂ flow rate	40 ml min^{-1}

Table 3. Specifications and market prices of desirable products.

Product	Specification	Price	Reference
FAME	B100 biodiesel	734 € t ⁻¹	Keysun Bio-Tech Co.Ltd
Amino acids	AA content: 54.4%	426 € t ⁻¹	Seek Bio-Technology Co.Ltd
Lutein	80%	284 € kg ⁻¹	Xi'an Lyphar Biotech Co.Ltd
Chlorophyllin	95%	165 € kg ⁻¹	Xi'an Lyphar Biotech Co.Ltd
β-carotene	95%	411 € kg ⁻¹	Xi'an Lyphar Biotech Co.Ltd

Table 4. Comparison of experimental conditions and growth performance of *C. sorokiniana* in flat panel PBR. PFD = photon flux density, D= dilution rate, C_X = biomass concentration and P_b = biomass productivity.

Medium	PFD	D	C_X	P_b	Reference
	($\mu\text{mol m}^{-2} \text{s}^{-1}$)	(d^{-1})	(g l^{-1})	($\text{g l}^{-1} \text{d}^{-1}$)	
M8a	2100	5.76	2.2	12.2	[16]
IC effluent	2100	3.6	1.56	5.87	[17]
IC effluent	200	1.44	1.09	1.67	
KJ influent	400	2.41	0.60	1.52	This study

Table 5. Comparison of media used for continuous cultivation of *C. sorokiniana* in flat panel PBR.

Indicator	Unit	M8a	IC effluent	KJ influent
COD	mg O ₂ l ⁻¹	-	590	386.9
N _{tot}	mg N l ⁻¹	1680	190	48.6
P _{tot}	mg P l ⁻¹	641	11-12	7.2
NH ₄ -N	mg N l ⁻¹	-	-	60.1

Table 6. Productivities of desired bioproducts.

Product	Yield (% w/w)	Productivity (mg l ⁻¹ d ⁻¹)
Biomass		1524
FAME	6.24	95
Protein	38.82	592
Lutein	0.103	1.57
Chlorophylls	1.182	18.01
β-carotene	0.044	0.671

811

812 Table 7. Fatty acids profile of *C. sorokiniana*

Type of fatty acid		Percentage
Total FAs (% dw.)		6.24
Fatty acid (% total FAs)	Palmitic acid (C16:0)	20.22
	Palmitoleic acid (C16:1)	9.51
	Oleic acid (C18:1)	19.82
	Linolenic acid (C18:3)	8.39

813 Table 8. Characterization of *C. sorokiniana* biomass in literatures.

Research focus	Growth performance ($\text{d}^{-1}/\text{g L}^{-1}\text{d}^{-1}$)	Lipid content (%, w/w)	FAME yield (%, w/w)	Protein content (%, w/w)	Reference
Effect of temperature	-	~ 10%	1.3 – 6.1%	-	[35]
Effect of C/N ratio	-	13 – 46%	2.1 – 7.3%	-	[33]
Pigment composition	5.76 d^{-1}	10.0%	-	68.5%	[37]
Effect of biochemical stimulants	$42\text{ mg l}^{-1}\text{d}^{-1}$	5 – 7%	-	45 – 60%	[38]
Mixotrophic growth	0.44 d^{-1}	20 – 50%	-	10 – 32%	[39]
Effect of inoculum size	0.89 d^{-1}	-	-	-	[40]
Photoautotrophic/ heterotrophic growth	-	21 – 26% (P) 20 – 56% (H)	0.6 – 0.8% (P) 12 – 33.6% (H)	12 – 13% (P) 6.2 – 13% (H)	[36]
Cultivation with deep sea water	$176.6\text{ mg l}^{-1}\text{d}^{-1}$	51.7%	47.51%	-	[41]
Cultivation in cattle manure	$12.77\text{ mg l}^{-1}\text{d}^{-1}$	25 – 35%	12%	34%	[42]
Fed-batch cultivation	3.29 d^{-1}	14.5 – 38.7%	12.8 – 34.1%	-	[43]
Photoautotrophic/ heterotrophic/ mixotrophic growth	0.68 d^{-1} (P) 2.07 d^{-1} (H) 3.40 d^{-1} (M)	-	9.0% (P) 6.2 – 17.6% (H) 13.4 – 34.7% (M)	-	[34]
Cultivation in domestic wastewater	$220\text{ mg l}^{-1}\text{d}^{-1}$	48.31%	-	-	[44]
Mixotrophic growth	1.602 d^{-1}	20 – 27%	-	-	[45]
Effect of nitrogen limitation	3.21 d^{-1}	20 – 51%	-	-	[46]
Continuous cultivation	2.41 d^{-1} , $1.52\text{ g l}^{-1}\text{d}^{-1}$		6.24%	38.8%	This study

(P: photoautotrophic; H: heterotrophic; M: mixotrophic)

Table 9. Estimation of biomass value.

Product	Yield	Productivity	Revenue
Biomass		1.524 g l ⁻¹ d ⁻¹	
FAME (B100)	0.0624 g g ⁻¹	0.095 g l ⁻¹ d ⁻¹	0.46 € kg ⁻¹
Amino acid fertilizer (54.4%)	0.3882 g g ⁻¹	0.592 g l ⁻¹ d ⁻¹	0.162 € kg ⁻¹
Lutein (80%)	1.03 mg g ⁻¹	1.565 mg l ⁻¹ d ⁻¹	0.292 € kg ⁻¹
Chlorophyllin (95%)	11.81mg g ⁻¹	18.014 mg l ⁻¹ d ⁻¹	1.950 € kg ⁻¹
β-carotene (95%)	0.44 mg g ⁻¹	0.671 mg l ⁻¹ d ⁻¹	0.181 € kg ⁻¹
Sum			2.630 € kg ⁻¹
Wastewater treatment	Removal	Quantity	Revenue
Wastewater		1581.4 L ⁻³ kg ⁻¹	
COD	52.1%	0.319 kg kg ⁻¹	0.042 € kg ⁻¹
Nitrogen	57.5%	0.044 kg kg ⁻¹	0.356 € kg ⁻¹
Phosphorus	68.8%	0.008 kg kg ⁻¹	0.242 € kg ⁻¹
Sum			0.640 € kg ⁻¹
Total revenue			3.271 € kg ⁻¹

List of figures

Figure 1. Specific growth rates in different dilutions of wastewater (Green: *C. sorokiniana*, Red: *S. obliquus*; striped columns correspond to the 1st generation, full columns to the 2nd generation).


Figure 2. Growth curves: (a) *C. sorokiniana*, first generation, (b) *C. sorokiniana*, second generation, (c) *S. obliquus*, first generation, (d) *S. obliquus*, second generation (wastewater concentration: square-100%, diamond-75%, triangle-50%, circle-25%)

Figure 3. Effect of dilution rates on cell concentration and volumetric productivity.


Figure 4. Bioflocculation in PBR (left), microscopic image of bioflocs (right).

Figure 5. Effect of dilution rates on nutrient removal efficiencies.


Figure 6. Scenarios for potential cost reduction.

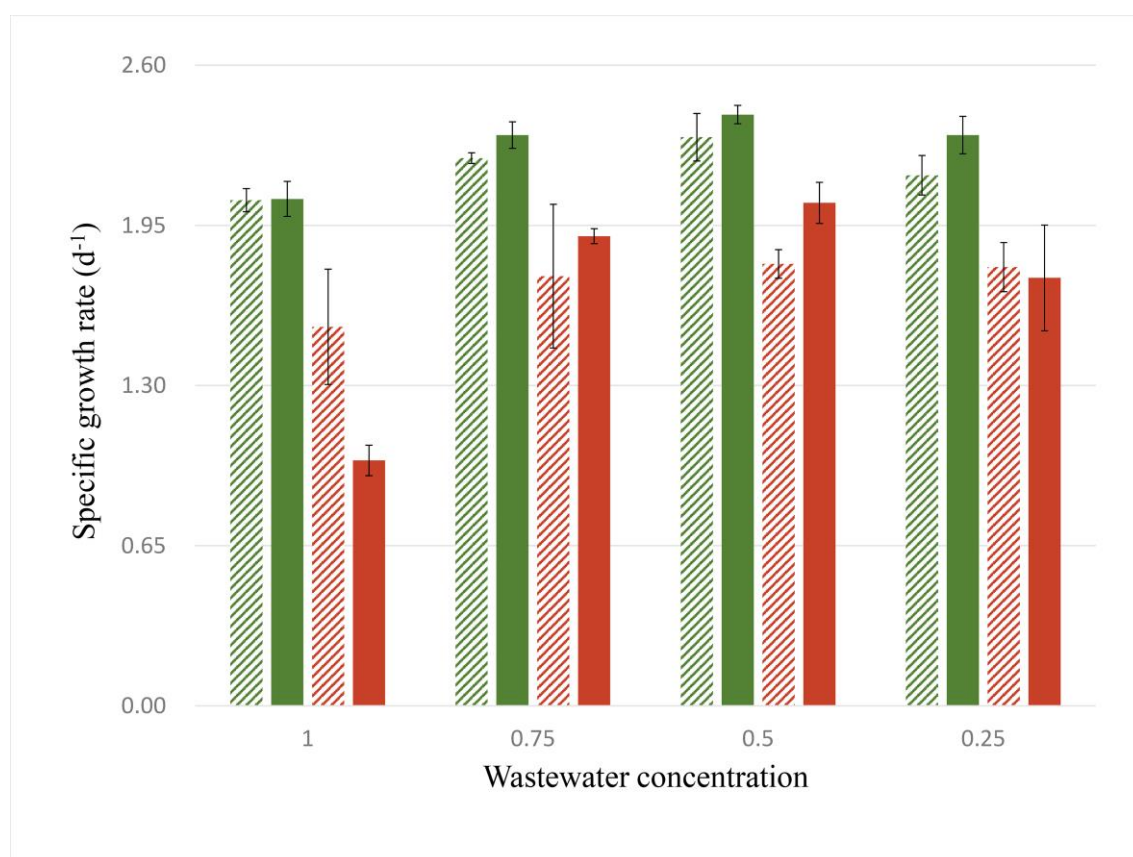


847

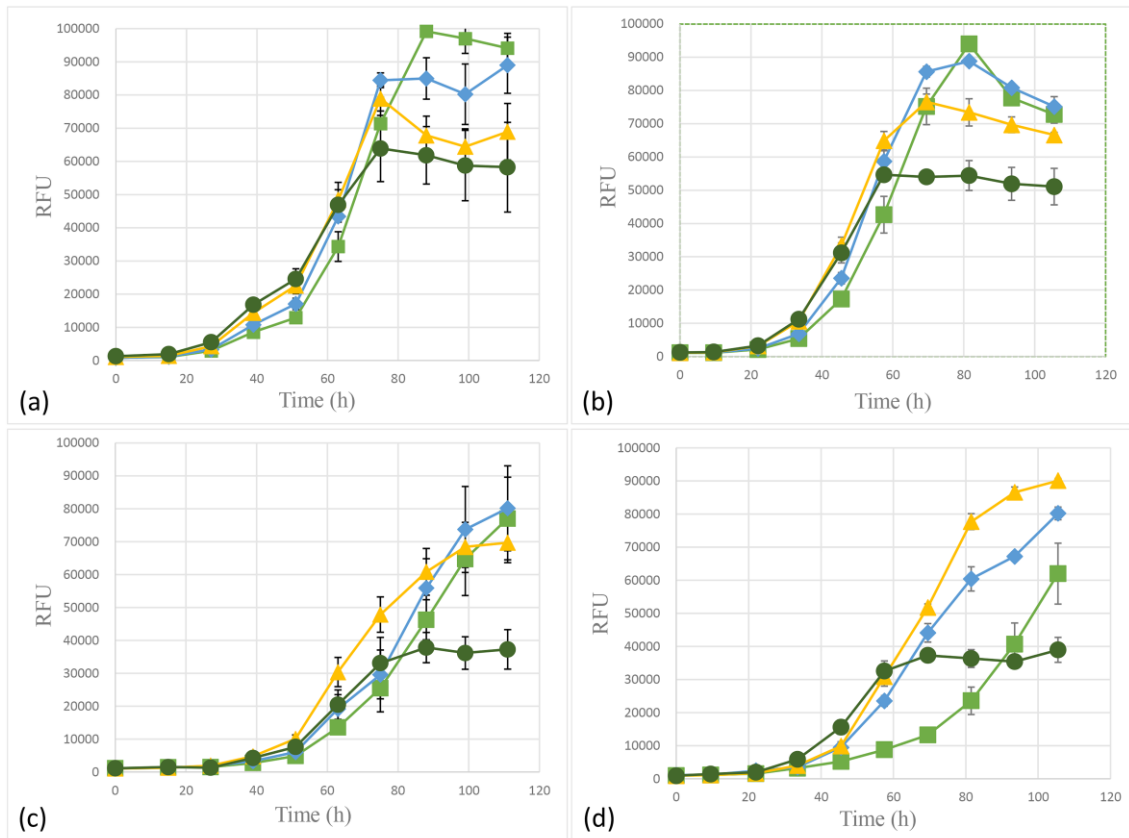


848

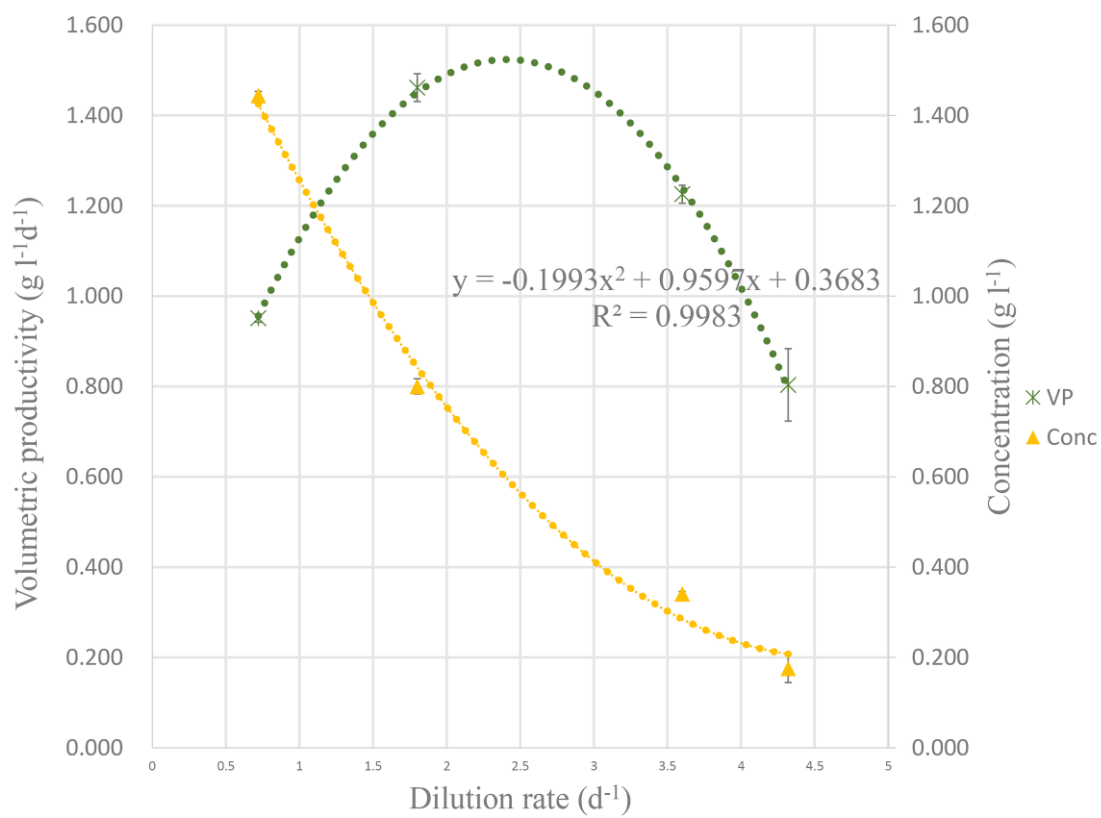


849

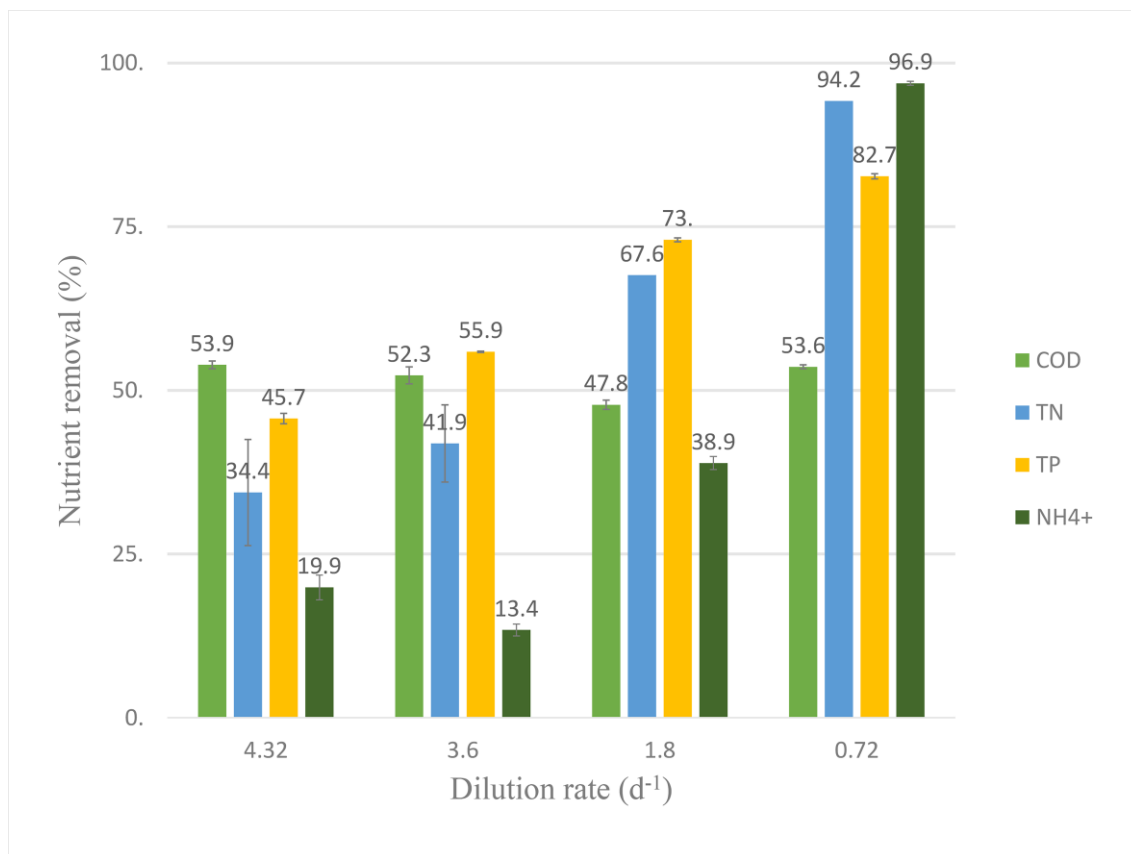


850

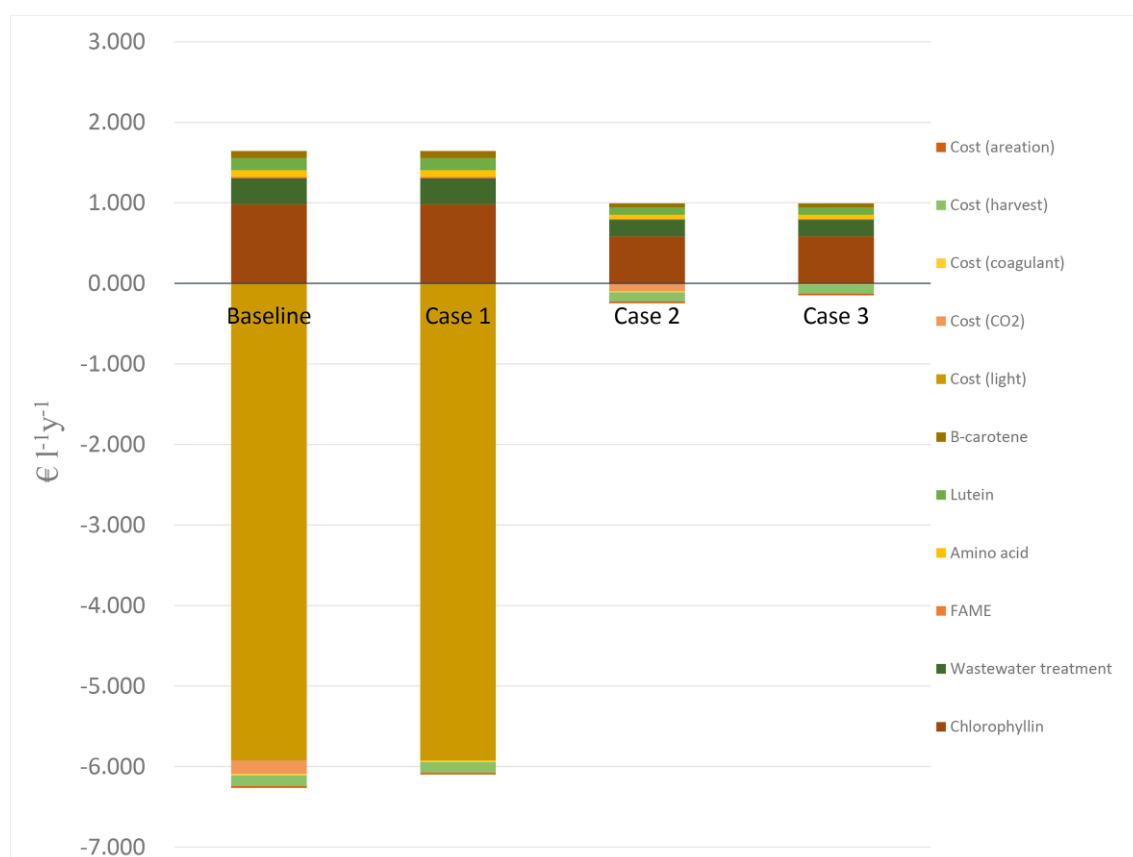

851

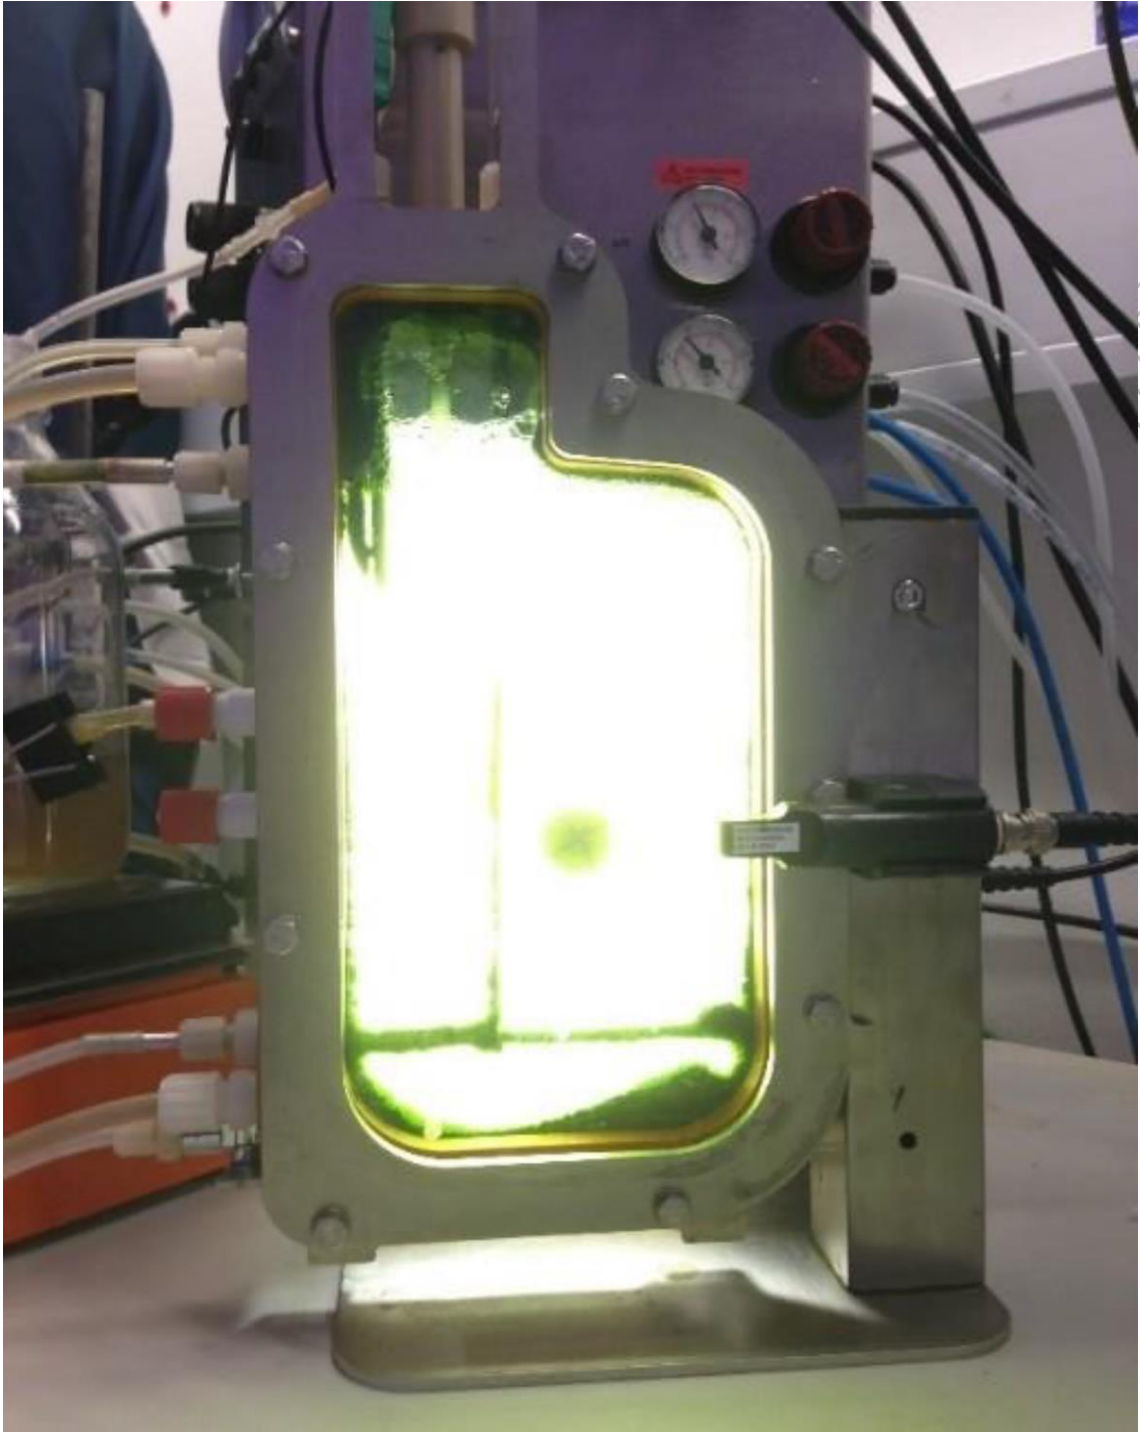

852

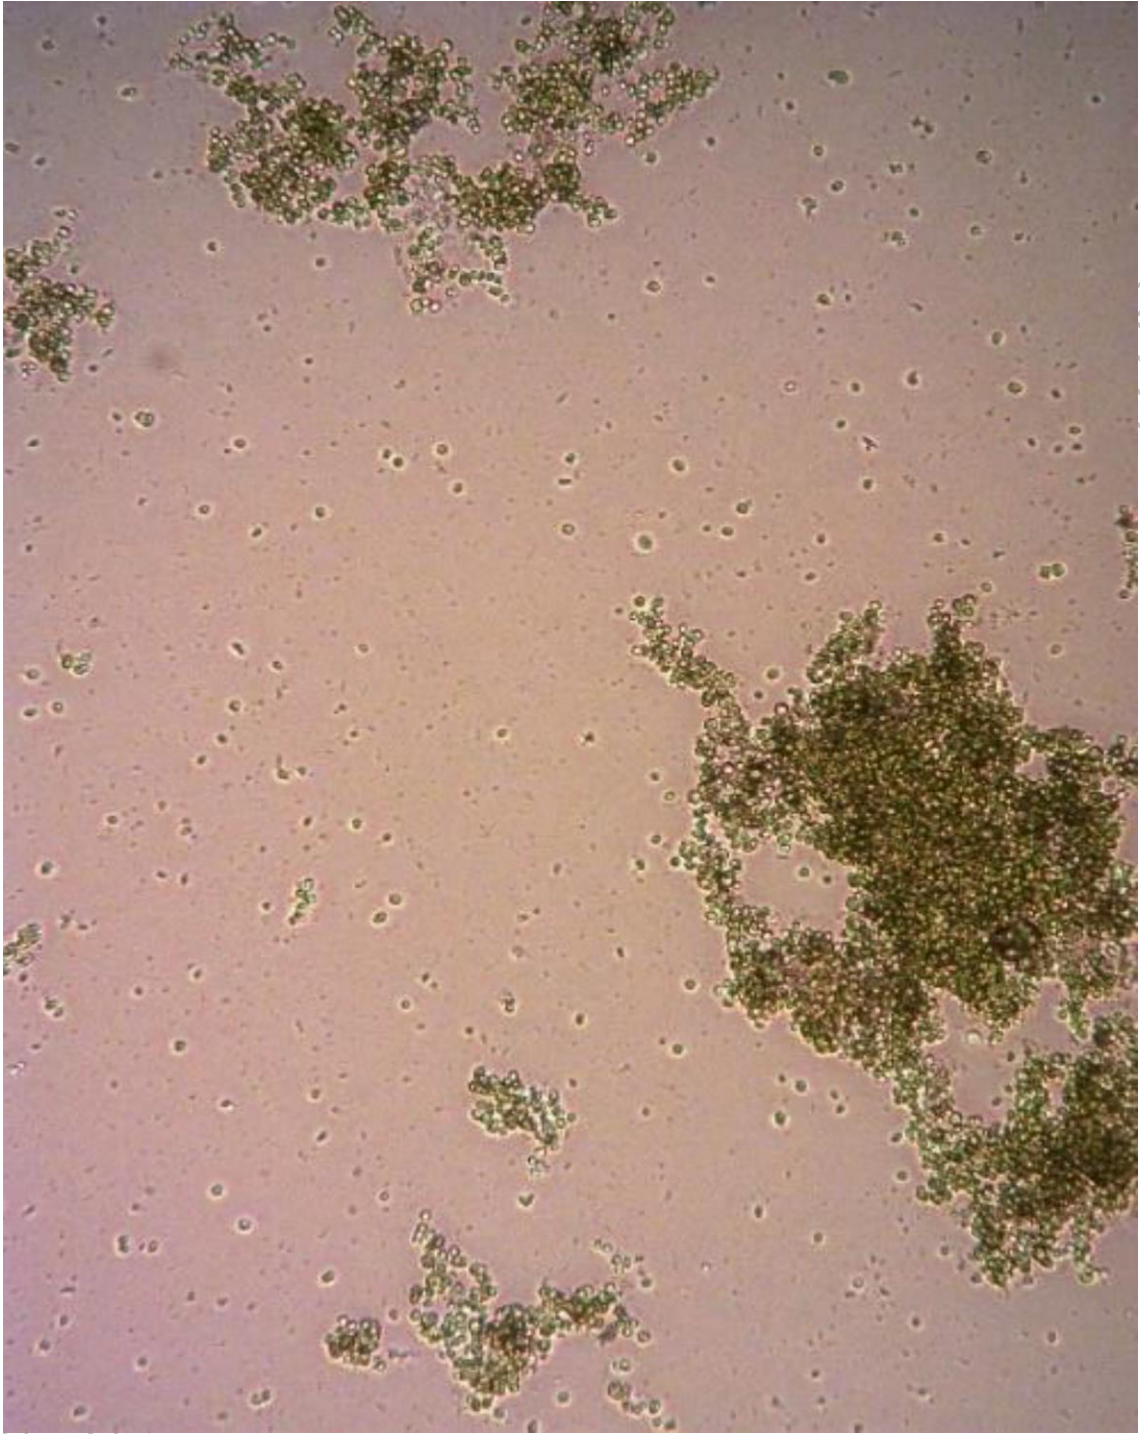

853